

MetaLight™ Linear Front Light Model#: LFL501



- Shock and Vibration proof up to 10 G's per MIL-STD-910F the highest industry standards
- Solid one-piece machined aluminum housings and thermal potting
- Performance extends to rugged environments
- Can be configured for wavelength and other specifications
- Equipt with pairing and axial rotation capabilities

Part #	Color	Power Supply	Specifications:	
LFL501-W-24	White 5500K	24 volt power supply available upon request.	Current Consumption	.6A @ 24VDC
LFL501-R-24	Red 630nm		Housing	Aluminum
LFL501-B-24	Blue 455nm		Finish	Anodized
LFL501-G-24	Green 530nm		Intensity Uniformity	+/-5%
LFL501-IRN-24	Infrared 850nm		Illuminance	75,000 Lux
LFL501-IRL-24	Infrared 880nm		Operating Temperature	120° F Max
LFL501-UVL-24	UV 395nm		Compliance	CE/RoHS
LFL501-UVS-24	UV 365nm		Lifetime Hours	75,000 Hours

10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

Active Area	Dimensions
1 in x 20 in 25.4mm x 508mm	21.14in x 1.13in x 1.25in 537mm x 28.6mm x 31.8mm

ORDERING INFORMATION:

• L F L 5 0 1 - - 2 4 -

W White 5500k
R Red 630nm
G Green 530nm
B Blue 455 nm
IRL Infrared 880nm
UVL (long) 395nm
UVS (short) 365nm

***BLANK** 10 ft. Flying Leads
T M12 Quick Disconnect
ILD In Line Dimmer
ILS In Line Strobe (customer provide trigger info)


MetaLight™ Linear Front Light Model#: LFL501

Wiring Diagram

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

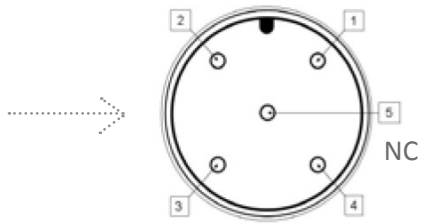

24 AWG 4 WIRES CABLE X 1

When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

(4) CONDUCTOR ELECTRICAL CABLE, 22 AWG 10 FT LONG WITH FLYING LEADWIRE ENDS

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	B	REVISED AND REDRAWN, KW	11-29-11	

#8-32 UNC X 5/16 DP BOTTOM TAP (2) PLACES BOTH SIDES (4) HOLES TOTAL

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF METAPHASE TECHNOLOGIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF METAPHASE TECHNOLOGIES, INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DRAWN	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±	KW	11/28/2011
CHECKED	ANGULAR: MACH ± BEND ±		
ENG APPR.	TWO PLACE DECIMAL ±		
MFG APPR.	THREE PLACE DECIMAL ±		
G.A.	INTERPRET GEOMETRIC TOLERANCING PER:		
COMMENTS:	MATERIAL:		
	FINISH:		
NEXT ASSY	USED ON		
APPLICATION	DO NOT SCALE DRAWING		

METAPHASE TECHNOLOGIES, INC.
TITLE: FRONT LIGHT, LINEAR, 2 X 20 INCH
SIZE DWG. NO. **B** LFL501 REV **B**
SCALE: NTS WEIGHT: SHEET 1 OF 1