


MetaLight™ 3 - Ring Off-Axis Ring Light Model#: TOARL201



- Horizontal Plane of Light
- Useful for Highlighting Surface Defects
- Illuminates Specular Surfaces
- Configurable for Wavelength
- Economical, High Power
- Additional Ring at larger incident angle for flexible illumination


Part #	Color	Power Supply	Specifications:
TOARL201-W-24	White 5500K	24 volt power supply available upon request.	Current Consumption 0.6A
TOARL201-R-24	Red 630nm		Individual Ring Draw 0.2A
TOARL201-B-24	Blue 455nm		Housing Anodized Aluminum
TOARL201-G-24	Green 530nm		Intensity Uniformity +/-5%
TOARL201-IRN-24	Infrared 850nm		Operating Temperature 120° F Max
TOARL201-IRL-24	Infrared 880nm		Compliance CE/RoHS
TOARL201-UVL-24	UV 395nm		Lifetime Hours 75,000 Hours
TOARL201-UVS-24	UV 365nm		

10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

Active Area	Dimensions
Ø4.44in Aperture Ø112.7mm Aperture	L: 7in / 177.8mm W: 7in / 177.8mm H: 2.5in / 63.4mm

Angle of LED Rings

TOP RING - 45°
CENTER RING - 20°
BOTTOM RING - 20°



ORDERING INFORMATION:

• T O A R L 2 0 1 - - 2 4 -


W	White 5500k	*BLANK	10 ft. Flying Leads
R	Red 630nm	T	M12 Quick Disconnect
G	Green 530nm	ILD	In Line Dimmer
B	Blue 455 nm	ILS	In Line Strobe (customer provide trigger info)
IRL	Infrared 880nm		
UVL	(long) 395nm		
UVS	(short) 365nm		

MetaLight™ 3 - Ring Off-Axis Ring Light Model#: TOARL201

Wiring Diagram

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

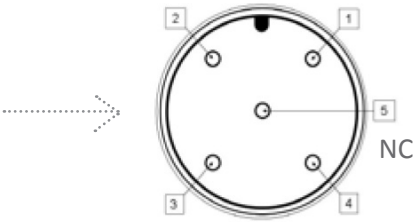

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

24 AWG 4 WIRES CABLE X 1

When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

ELECTRICAL CABLE, 10 FT LG (4) CONDUCTOR, 22 AWG WITH FLYING LEAD WIRE ENDS

Ø 4.00 [101.6]

Ø 4.44 [112.7]

#8-32 UNC X 3/16 DP (4) PLACES

Dimensions: 7.00 [177.8], 3.50 [88.9], 2.23 [56.6], .38 [9.5], 3.00 [76.2], 2.00 [50.8], 2.50 [63.4], .89 [22.6], 1.40 [35.6]

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	C	REDRAWN IN SOLIDWORKS, KW	4/30/2012	

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	METAPHASE TECHNOLOGIES, INC.
DIMENSIONS ARE IN INCHES	TOLERANCES:	DRAWN	KW	4/25/2012
FRACTIONAL ±1/64	ANGULAR: MACH ±2° BEND ±2°	CHECKED		
TWO PLACE DECIMAL ±.01	INTERPRET GEOMETRIC TOLERANCING PER:	ENG APPR.		
THREE PLACE DECIMAL ±.005		MFG APPR.		
		Q.A.		
		COMMENTS:		

TOARL241	USED ON	FINISH	SCALE: 1:2	WEIGHT:	SHEET 1 OF 1
TOARL221					

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF METAPHASE TECHNOLOGIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF METAPHASE TECHNOLOGIES, INC. IS PROHIBITED.